

# Installation Guide

## ELCD 1008 Branch Circuit Emergency Lighting Transfer Switch

### Overview

The ELCD 1008 Branch Circuit Emergency Lighting Transfer Switch (BCELT) transfers a single lighting circuit from its normal power source to an emergency power source in the event of the loss of normal power or an external trigger (e.g., fire alarm).



The ELCD 1008 includes the following features and functions:

Front panel accessible push-and-hold Test Switch

Front panel accessible Laser Test, enabling remote testing with the use of a laser pointer (or similar)

Front panel status indicators for Normal Power (green) and Emergency Power (red)

Fire alarm dry contact input, which can be set for normally open or normally closed operation

Auxiliary relay for 0–10V or Digital Addressable Lighting Interface (DALI) control signals

### Compliance

The ELCD 1008 meets or exceeds the following regulatory standards:

UL Listed to UL 1008 for Branch Circuit Emergency Transfer Switch Equipment

cUL Listed to CSAC22.2 Emergency Transfer Switch Equipment

UL Listed to UL2043 for plenum rated products

Complies with ANSI/ NFPA110, Standard for Emergency and Standby Power Systems

Satisfies requirements of the National Electrical Code (NFPA70):

Article 700–Emergency Systems

Article 701–Legally Required Standby Systems

Article 702–Optional Standby Systems

Section 518.3(C)–Assembly Occupancies

Section 520.7–Theatres and Similar Locations

Section 540.11(C)–Motion Picture Projection Rooms

# Installation Guide

## ELCD 1008

---

### Installation Requirements

Install the ELCD 1008 in a location that is accessible by qualified personnel for testing of the transfer function using either a laser pointer (or similar) or the on board test switch.

The ELCD 1008 installs to a flat surface, has four conduit entry locations, and has four mounting holes. Mounting and conduit hardware are provided by others.

---



**Note:** Suitable for use in other spaces used for environmental air (plenums) in accordance with Article 300 of the National Electrical Code (NFPA70).

---

### Ambient Environment

NEMA Type1 Enclosure suitable for installation location that conforms to the following ambient environment:

- 0–40°C, 5%–95% non–condensing humidity

### Electrical Specification

---



**Note:** Continuous load current not to exceed 100% of the switch rating. Use copper wire only, minimum 75°C conductors.

---

### *Normal and Emergency Rated Operational Voltage Input*

120–277 VAC +/-10%, 50/60Hz

### *Load Rating*

Supports a continuous load of up to 20A for tungsten and resistive load types, and supports electronic ballast loads of up to 16A (80% of the switch rating)

Continuous load current not to exceed 100% of the switch rating

### *Transfer Initiation*

When normal power is lost, meaning the voltage drops below 85VRMS, the unit transfers the output load to the emergency power source.

When normal power is restored, meaning the voltage rises above 90VRMS, the unit transfers the output load to the normal power source.

### *Short Circuit Current Rating*

Short circuit capacity of 10kA

# Installation Guide

## ELCD 1008

### *Fire Alarm Input*

The Fire Alarm Input allows power transfer to the emergency power source (if emergency power is present) when triggered by an external system.



**Note:** This transfer is activated even when normal power is still present.

The contact input can be configured for normally open or normally closed operation using switch settings on the control board. Normally open and normally closed refer to the normal operational state of the external circuit, not to the de-energized state of the external relay.

When the contact input is triggered, the unit will transfer to the emergency power source.

- When the contact input trigger is removed, the unit will transfer back to the normal power source, if present,
- or will remain on emergency power until normal power is restored.



**Note:** The fire alarm input functions with up to 1,000ft (300m) of 18AWG wire connected between the input and the switch. Fire Alarm Inputs of up to 10 ELCD 1008 units can be wired together using a single normally open or normally closed contact. **See Fire Alarm Input on page 7 for details.**

### *0–10V Auxiliary Output*

The 0– 10V Auxiliary Output provides an additional single pole relay that opens when the unit is in the emergency state. This allows connection of 0– 10V or DALI ballasts that need the removal of the control signal in order to illuminate at full in an emergency state.

## Installation

### Mounting and Conduit


Using the mounting holes in the bottom of the enclosure, secure the ELCD 1008 enclosure to a flat surface using four 1/4-20 mounting bolts or screws (provided by others).

Four knockouts are provided on the side of the enclosure. Install conduit fittings (provided by others).




**Note:** The ECLD1008 enclosure can be rotated 90°, to change the orientation as needed for the installation.

The front cover has a legend printed on both sides to insure correct indication of status LEDs and Test Switch.

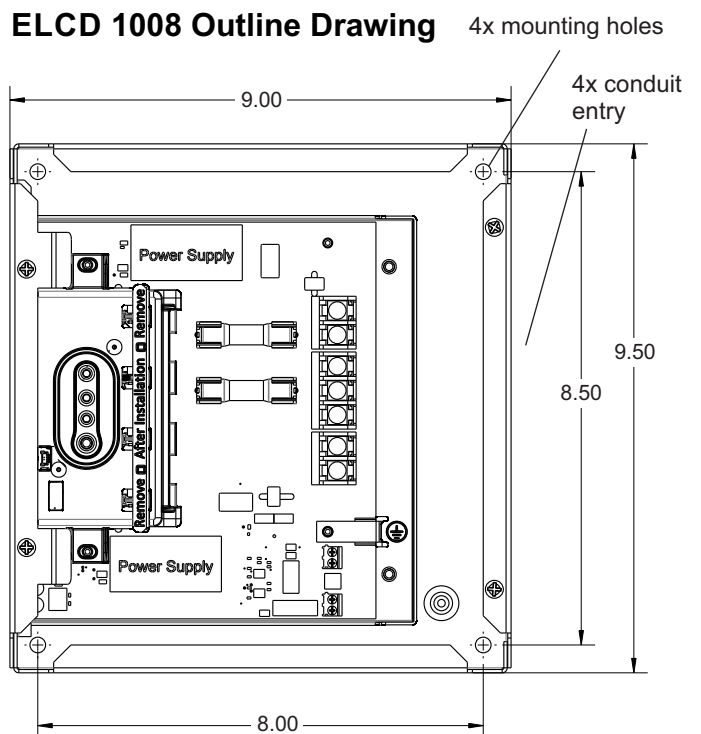

# Installation Guide

## ELCD 1008

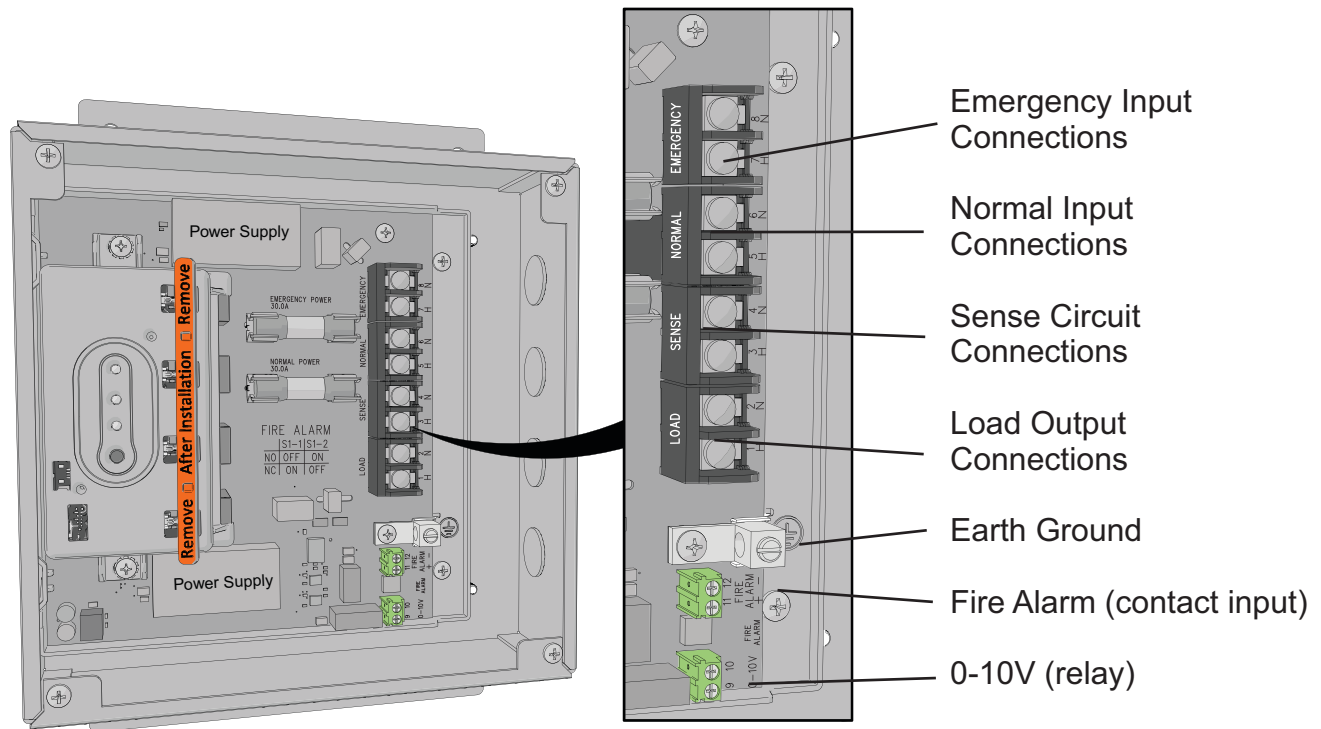

## Wire Terminations

The ELCD 1008 can accommodate installations that require a **Simple Transfer** of normal and emergency power or more complex installations that utilize a **Dimmed or Switched Load**. See the related instruction for your installation type. Additionally, the unit can accommodate installations that utilize **0–10V Auxiliary Output** control and for use with either normally open or normally-closed operation.



**WARNING:** Before you begin pulling and terminating wire to the ELCD 1008 BCELTS enclosure, make sure the main circuit breaker cabinet or other readily accessible input power disconnect device for both normal and emergency power input is locked out and tagged out. Enclosures installed without an accessible input power disconnect device cannot be serviced or operated safely. Follow all local codes and restrictions. When the disconnect device is not located near the installed enclosure, the disconnect must allow for proper lockout/tagout.

## Wire and Terminal Specifications

| Terminal                          | Wire Range                             | Strip Length | Torque Rating |
|-----------------------------------|--|--------------|---------------|
| Line / Load / Terminals 1–8       | 10–18 AWG (copper wire solid/stranded) | 3/8" (10mm)  | 10 in–lbs     |
| Control (signal) / Terminals 9–12 | 10–20 AWG (copper wire stranded only)  | 1/4" (6mm)   | 4 in–lbs      |
| Earth Ground                      | 6–14 AWG (copper wire solid/stranded)  | 3/8" (10mm)  | 35 in–lbs     |

# Installation Guide


## ELCD 1008

### Earth Ground

See **Wire and Terminal Specifications on Page 4** for specification of wire, strip length, and terminal torque ratings, then prepare and terminate your earth ground wire to the lug provided in the enclosure.


### Simple Transfer

A simple transfer installation would be used for a load that is intended to be always on. In the event of loss of normal power, the load is transferred to the emergency power source but remains on. There is no control over the load.

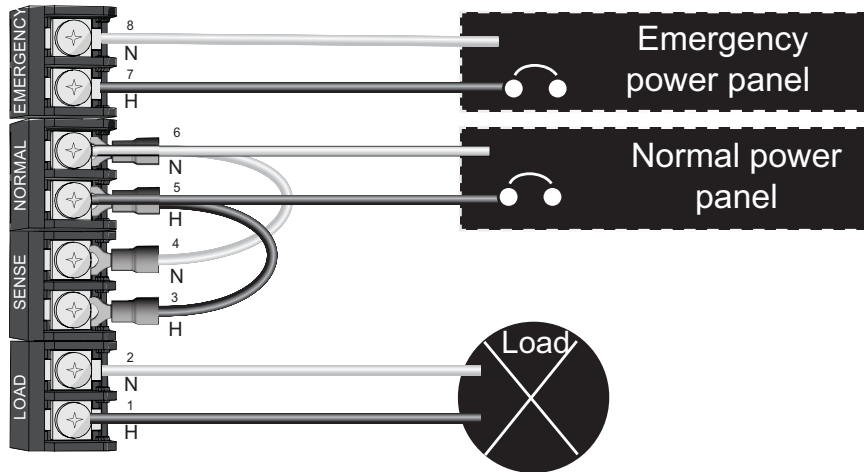

1. See **Wire and Terminal Specifications** for wire size, strip length, and terminal torque.
2. Terminate load wires.
  - a. Run a neutral and a hot load wire through conduit to the load position for the load to be transferred from the ELCD 1008.
  - b. Terminate to the respective terminals LOAD 2N (neutral) and LOAD 1H (hot) in the ECLD 1008 enclosure, securing each terminal screw onto the wire.
3. Install normal sense jumpers.
  - a. Install a jumper wire between terminals SENSE 3H (hot) and NORMAL 5H (hot).
  - b. Install a jumper wire between SENSE 4N (neutral) and Normal 6N (neutral).
4. Terminate normal power wires.
  - a. Run a neutral and a hot wire through conduit from the normal power source to the ELCD 1008.
  - b. Terminate the neutral wire to the NORMAL 6N (neutral) terminal and secure the terminal screw onto the wire and the jumper fork terminal.
  - c. Terminate the hot wire to the NORMAL 5H (hot) terminal and secure the terminal screw onto the wire and the jumper fork terminal.
5. Terminate emergency power wires.
  - a. Run a neutral and a hot wire through conduit from the emergency power source to the ELCD 1008.
  - b. Terminate to the respective terminals EMERGENCY 8N (neutral) and EMERGENCY 7H (hot) in the ELCD 1008 enclosure, securing each terminal screw onto the wire.

### Step 3

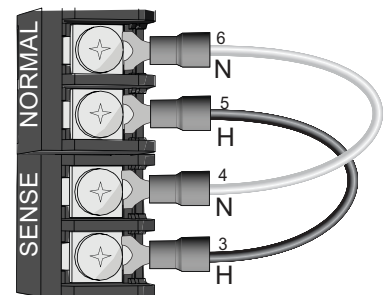


# Installation Guide

## ELCD 1008

### Dimmed or Switched Load

The ELCD 1008 has the ability to separate the sensing of normal power from the load itself; this allows you to have a light switch or dimmer controlling the load when normal power is available, but to have the load transfer to emergency power in the event of normal power loss.

The ELCD 1008 can be used with switched or dimmed power control.

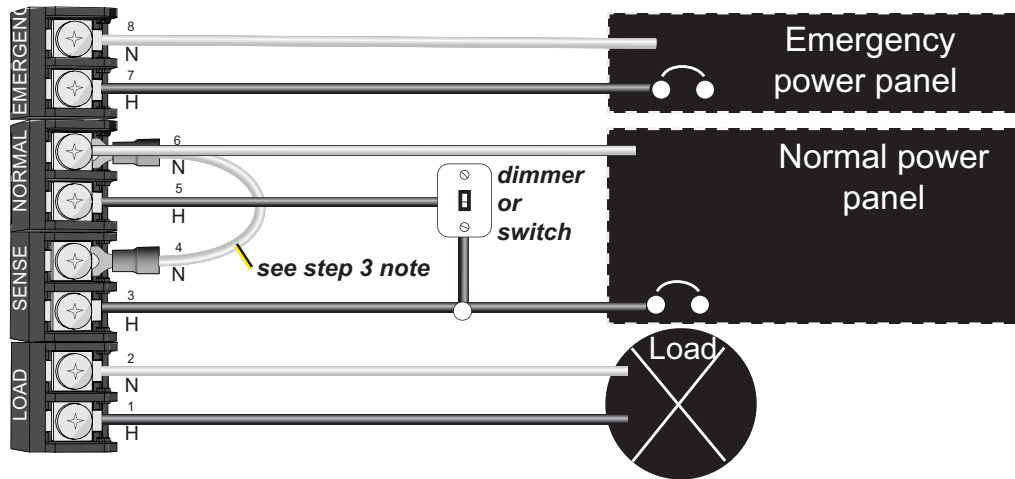

1. See Wire and Terminal Specifications on page 4 for wire size, strip length, and terminal torque.
2. Terminate load wires.
  - a. Run a neutral and a hot load wire through conduit for the load to be transferred from the ELCD 1008 to the load position.
  - b. Terminate to the respective terminals LOAD 2N (neutral) and LOAD 1H (hot) in the ELCD 1008 enclosure, securing each terminal screw onto the wire.
3. Install a jumper wire between SENSE 4N (neutral) and Normal 6N (neutral).



**Note:** If using a separate neutral for the sense circuit, do not install the jumper. If using a three-wire feed as shown above, install the jumper as described in step 3.


4. Terminate normal power wires.
  - a. Run a neutral and a hot wire through conduit from the normal power source (controlled dimmer or switch) to the ELCD 1008.
  - b. Terminate the neutral wire to the NORMAL 6N (neutral) terminal and secure the terminal screw onto the wire and the jumper fork terminal.
  - c. Terminate the hot wire to the NORMAL 5H (hot) terminal and secure the terminal screw onto the wire.
5. Terminate normal sense wire
  - a. Run a hot sense wire from a non-controlled output of the normal power source through conduit to the ELCD 1008.
  - b. Terminate to SENSE 3H (hot) in the ECLD 1008 enclosure, securing the terminal screw onto the wire.
6. Terminate emergency power wires.
  - a. Run a neutral and a hot wire through conduit from the emergency power source to the ELCD 1008.
  - b. Terminate to the respective terminals EMERGENCY 8N (neutral) and EMERGENCY 7H (hot) in the ELCD 1008 enclosure, securing each terminal screw onto the wire.

# Installation Guide

## ELCD 1008

### 0-10V Auxiliary Output

The ELCD 1008 features a single pole auxiliary relay that provides switching for installations utilizing 0–10V or Digital Addressable Lighting Interface (DALI) controls. In the event of an emergency, the relay opens the control circuit, sending any connected loads to their full intensity output.

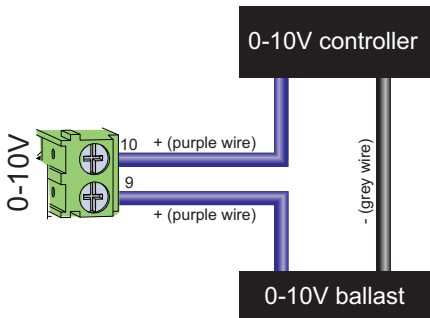

**Note:** All low-voltage Class 2 wiring must be separated from all Class 1 wiring. Follow local codes and installation restrictions.


Go2Power recommends limiting the distance run for the 0–10V control wiring from the controller to the last ballast (driver) to 300ft, based on 18 AWG wire.

1. Run a +10V wire, typically purple, between the 0–10V controller and the 0–10V terminal 10 in the ELCD 1008 and secure the terminal onto the wire.
2. Run a +10V wire, typically purple, between 0–10V ballast and the 0–10V terminal 9 in the ELCD 1008 and secure the terminal onto the wire.
3. Run a common wire, typically gray, between the 0–10V controller and the 0–10V ballast.

### Fire Alarm Input

The ELCD 1008 features a single dry-contact input that can be used to force the transfer from normal to emergency state, even if both normal and emergency power are present. The contact may be configured for either normally closed (NC) or normally open (NO) operation by setting switch 1 and 2 on the ELCD1008 control board.


1. Run a positive control wire between the fire alarm device and the FIRE ALARM 11 “+” terminal in the ELCD 1008 and secure the terminal onto the wire.
2. Run a negative (common) control wire between the fire alarm device and the FIRE ALARM terminal 12 “-” and secure the terminal onto the wire.

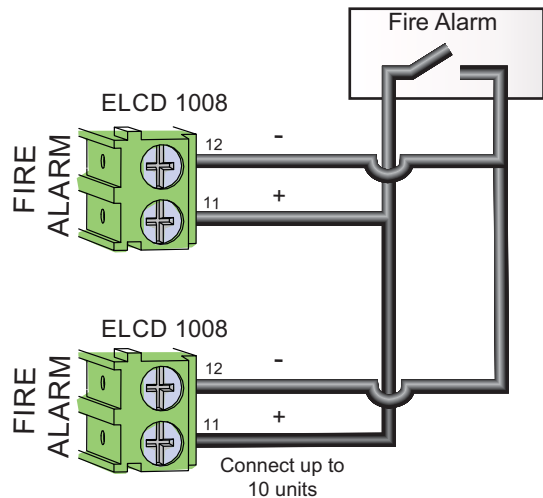

**Note:** The system supports connection of up to 10 ELCD 1008 units connected in parallel to the fire alarm device.

3. Set the fire alarm contact input configuration switches for either normally open or normally closed operation.

| FIRE ALARM |     | S1-1 | S1-2 |
|------------|-----|------|------|
| NO         | OFF | ON   | ON   |
| NC         | ON  | OFF  | OFF  |




# Installation Guide

## ELCD 1008

### Final Installation and Power Up

1. Check that each termination point is secure.
2. Check that the fire alarm contact input switches are set for correct switch operation, either normally open or normally closed.
3. Clear all debris from the inside of the enclosure.
4. Remove and discard the orange plastic strip that is securing the relays in place.
5. Attach and secure the front cover to the enclosure.
6. Apply both normal and emergency power to the unit.
7. Test the operation of the ELCD 1008 as described in Operation and Test below.

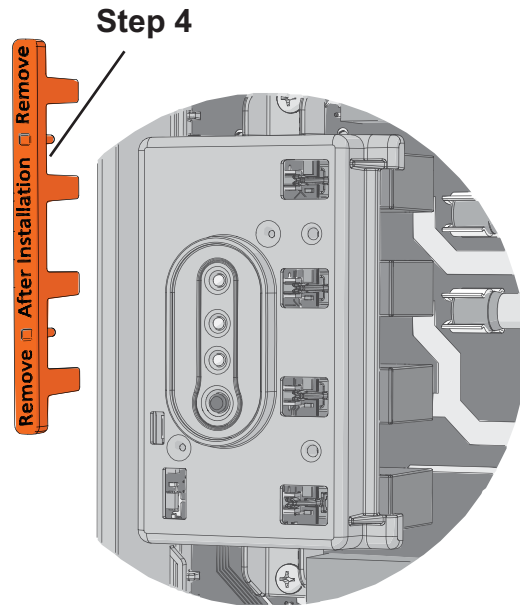

### Operation and Test

It is important to test the ELCD 1008 regularly because it is a life safety device. **NFPA 101 Life Safety code requires testing of life safety devices every 30 days.**

Test the ELCD1008 unit using either the test button or laser test as described in the following sections.

### LED States

| Red LED  | Green LED | State   | Notes  |
|----------|-----------|---|--|
| On       | On        | Normal and Emergency power are both present. The ELCD 1008 is supplying Normal power to the load. |  |
| Blinking | Off       | The ELCD 1008 is supplying Emergency power to the load  | This may be due to the loss of normal power, the making of the fire alarm contact, or the activation of the test mode  |
| Off      | On        | Normal power is present, Emergency power is not.  | The ELCD 1008 is supplying Normal power to the load and will not transfer  |
| Off      | Off       | Neither normal nor emergency power are being supplied to the unit.                                | If the LEDs are not lit as expected when power is present, it is possible that one or both of the internal fuses have blown. See <b>Fuse Replacement on page 9</b> |
| Blinking | Blinking  | Relays are detected in an invalid state.  | If both LED's are blinking, the ELCD 1008 relays need to be manually reset to a known state. See Troubleshooting on page 10 for details.                           |



# Installation Guide

## ELCD 1008

---

### Test Button

Press and hold the “PUSH TO TEST” button to place the ELCD 1008 into emergency mode and transfer the load from normal power to emergency power. The ELCD1008 remains in emergency mode until you release the “PUSH TO TEST” button. If emergency power is not present for the test, the ELCD1008 will remain in normal mode.

### Laser Test

Directing a laser pointing device at the “REMOTE TEST” sensor located on the front of the ELCD 1008 enclosure places the ELCD 1008 into emergency mode and transfers the load from normal power to emergency power. The ELCD1008 remains in emergency mode for 10 seconds and then returns to normal mode. If emergency power is not present for the test, the ELCD 1008 will remain in normal mode.



**Note:** All low-voltage Class 2 wiring must be separated from all Class 1 wiring. Follow local codes and installation restrictions.

*Go2Power recommends limiting the distance run for the 0–10V control wiring from the controller to the last ballast (driver) to 300ft, based on 18 AWG wire.*

---

## Fuse Replacement

---



**WARNING: RISK OF ELECTRIC SHOCK! More than one live circuit is present inside the enclosure. Make certain the main circuit breaker cabinet or other readily accessible input power disconnect device for both Normal and Emergency power input is locked out and tagged out before removing the cover from this enclosure.**

---

In-line fuses are present for the normal power input and the emergency power input. Replace fuses only with Class G SLC 30A fuses.

1. Disconnect both power supply sources and lock/tag out appropriately.
2. Loosen the four screws and remove the cover.
3. Use a voltmeter to test if the fuses are functional, and replace the ones that have failed.
4. Replace the cover to the enclosure.
5. Re-apply power from both sources and test the unit. See **Operation and Test on page 8** for instructions on testing the unit.

# Installation Guide

## ELCD 1008

---

### Troubleshooting


When both of the ELCD 1008 LEDs are blinking, the relays need to be manually reset to a known state.



**WARNING: RISK OF ELECTRIC SHOCK!** More than one live circuit is present inside the enclosure. Make certain the main circuit breaker cabinet or other readily accessible input power disconnect device for both normal and emergency power input is locked out and tagged out before removing the cover from this enclosure.

---

1. Disconnect both power supply sources and lock/tagout appropriately.
2. Loosen the four screws and remove the cover.

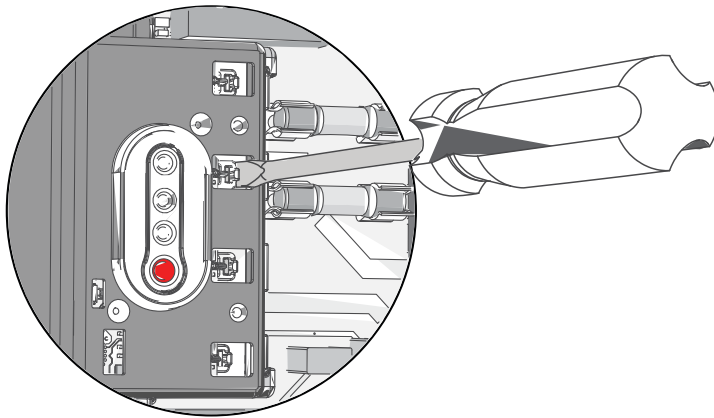

3. Locate the four relay switches near the status LEDs.
4. Using a flat blade screwdriver, carefully slide the relay switch to the left.
5. Repeat for all four relays in the ELCD 1008 enclosure.
6. Replace the cover to the enclosure.
7. Re-apply power from both sources and retest the unit.

**See Operation and Test on page 8** for instructions on testing the unit.