

TUFFLITE DT

Product Discontinued

NEMA 12 Industrial Emergency Light

Tufflite "DT" Industrial NEMA emergency lighting units are designed for use in hostile indoor applications. The rugged 16 gauge gasketed steel enclosure meets the requirements of NEMA 12 providing protection for the enclosed equipment against dust, dirt, fibers and dripping water.



CONSTRUCTION

- Fully gasketed to meet the requirements of NEMA 12 applications
- Rugged 16 gauge steel housing with fully welded corners, finished in durable grey powder coat
- Piano hinged front access door for ease of maintenance access with stainless steel latch hardware
- External 4 hole mounting provision provides ease of installation with minimal cabinet intrusion

ELECTRICAL

- Two fully adjustable, top mounted PAR 36 style lamp heads in high impact thermoplastic available with a variety of lamp types and wattages
- Choice of maintenance free sealed Lead Calcium or Nickel Cadmium batteries
- Premium, fully automatic current limited "Pulse Switching" charger provides ideal charge conditions for optimum battery performance and life
- Short Circuit battery protection
- Field selectable 120 or 277 VAC input
- Sealed external Momentary test switch and dual diagnostic LED indicator displays AC and Hi-Charge status
- Brownout sensing assures emergency operation during periods of low line voltage
- Line-latch prevents unnecessary discharge of battery during installation, loads will not illuminate until after application of utility power
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge
- Self-Test / Self-Diagnostic monitoring available

CERTIFICATION

- Listed to UL 924, meets NFPA 101 Life Safety Code, NFPA 70-NEC, and OSHA requirements

WARRANTY

- 3 Year Limited Warranty

ADDITIONAL IMAGES



ORDERING GUIDE

DT2E36-2-W69-SD


MODEL	OPERATING VOLTAGE/WATTAGE		NO. OF LIGHTHEADS	LIGHTHEADS	OPTIONS	ORDERING NOTES <div>1 Specify AC voltage</div> <div>2 For food prep applications</div>
DT	Lead Calcium Battery 90 Minute Capacity ¹	Nickel Cadmium Battery 90 Minute Capacity	0 No Light Heads	STANDARD	SD Self-Test/Self-Diagnostic	
			2 Double Light Heads	W69 6V 9W Lamp Head	V Voltmeter	
				W129 12V 9W Lamp Head	A Ammeter	
				OPTIONAL	H Internal Heater	
				L65 6V 5W LED MR16	TD 15 Minute Time Delay ¹	
				L67 6V 7W LED MR16	C 3 Ft Conductor Cord & Plug	
				L125 12V 5W LED MR16	TP Tamper-proof Screws	
				L127 12V 7LED MR16	SR Shatter Resistant Lamp Head Shield ²	
DT						

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:

DIMENSIONS

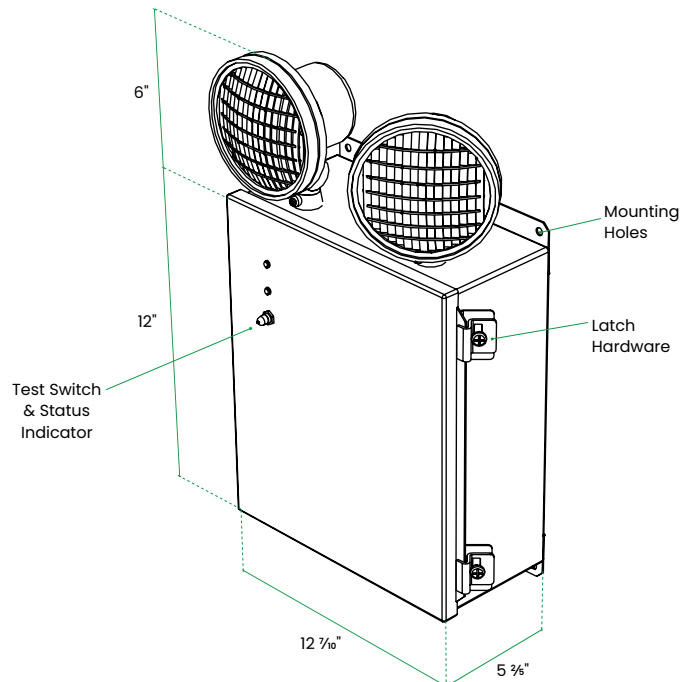

OPERATING CHARACTERISTICS

MODEL	VOLTAGE	WATTAGE			
		90 MIN	2 HRS	3 HRS	4 HRS
DT2N22	6	22	17	11	9
DT2E27	6	27	20	14	10
DT2E36	6	36	27	18	13
DT2N42	6	42	31	21	15
DT2N54	6	54	41	27	21
DT2E60	6	60	45	30	22
DT2E72	6	72	54	36	27
DT2N90	6	90	60	45	30
DT2E100	6	100	75	50	35
DT2E120	6	120	90	60	45
DT4N130	12	130	97	65	48
DT4N140	12	140	105	70	52

NiCad Batteries deliver the same capacity per wattage as above for listed models