


RT

Remote Test Switch & Monitor

RT Option for PW and PWII Inverter Lines

Remote Test Switch and Monitor option allows the user to fully monitor the status of the sine wave inverter from a remote location.

The user can now locate the inverter away from public areas in schools or other public access buildings where there may be a concern with unauthorized entry to the system.

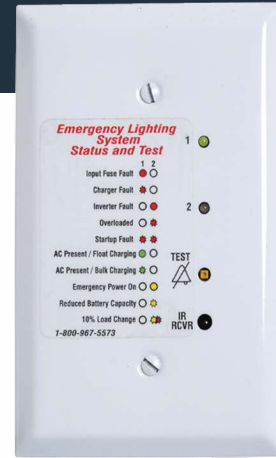


FEATURES

- Full system status display, including infrared receiver, test buttons, self-diagnostic LED Indicators, buzzer and system status LED's
- Clear easy to read and distinguish from other equipment monitors
- Remote Test Monitor can be used with the TLRT infrared hand held remote option for ease of on-demand testing
- Remote display installs easily in a standard switch box
- Quick interconnect from inverter to remote test panel with Cat. 5 cable (not provided)
- RJ 45 connection points provided on inverter and remote test display pc boards
- Remote Test Display can be mounted up to 100' from the inverter, consult factory for greater distances
- Suitable for wall or ceiling mounting

WIRING INSTRUCTIONS

NOTE* (Supplied by others)

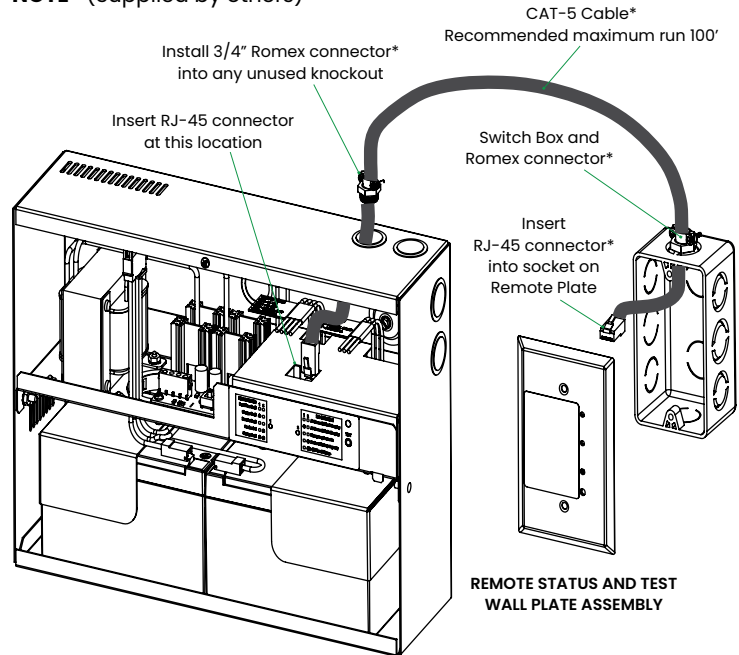

"NOT INTENDED FOR NETWORK CONNECTION"

Note: RJ-45/CAT-5 is used for direct connection from Inverter to Remote Display only