

# TELESIS TS

## Steel LED Exit Sign

The Telesis TS combines strength, efficiency, and reliability in one sleek package. Built with a durable 20-gauge steel housing and powered by long-life, energy-saving LEDs, this exit sign delivers dependable performance while minimizing maintenance. Its universal mounting options, interchangeable faceplates, and ultra-bright illumination make it simple to install and highly visible in any environment. Backed by a five-year limited warranty and compliant with UL924 and NFPA 101 Life Safety Code, the Telesis TS is designed to keep people safe while offering exceptional value.



### CONSTRUCTION

- Durable 20 gauge steel housing in White and Black power coat finishes available
- Universal mounting pattern on the back plate for wall mount applications
- Interchangeable face-plates slide out for quick and easy installations
- Mounting canopy included for top or end mounting
- Field selectable knockout chevron directional indicators
- Stencil face with 6" letters with 3/4" Stroke
- Optional pendant mounting available

### ELECTRICAL

- 120/277VAC field selectable input
- Long life maintenance free Nickel Cadmium battery provides the required 90 minute operation
- Optional 120 minute emergency operation available
- Battery operating temps 10° to 40° C

- Battery recharges in 24 hours following a 90 minute discharge
- Fully automatic solid state operation for maintenance free reliability
- Test switch and AC present indicator, EM models

### ILLUMINATION

- Ultra-bright red or green LED's consume 2 watts or less nominal power

### CERTIFICATION

- Listed to UL924 and meets or exceeds NFPA101 Life Safety Code, NEC-NFPA 70, OSHA requirements
- Buy American Act compliant

### WARRANTY

- 5 year limited warranty - view complete warranty terms online at [www.evenlite.com/terms-warranty](http://www.evenlite.com/terms-warranty).

### ORDERING GUIDE

TS-AC-R-U-W-CN

MODEL	OPERATION	LETTER COLOR	FACE COUNT	HOUSING COLOR	MOUNTING	OPTIONS	ORDERING NOTES
TS	AC AC Only (120/277V)	R Red	U Universal	W White	CN Canopy Mount <sup>1</sup>	SD Self-Test/Self-Diagnostic	1 End/Ceiling Mounting 2 Consult Factory 3 AC Models only, specify input voltage 4 Dimensions: 16.5"W x 14"H x 3"D
	EM Nickel Cadmium 90 min. battery backup	G Green		B Black	PA 12" Hang Straight Pendant	CC Custom Color <sup>2</sup>	
					2H 2 Hour Run Time	DKV1 Dual Circuit Input, 120VAC	
						DKV2 Dual Circuit Input, 277VAC	
						TP Tamper-proof screws	
						TSWG Wireguard <sup>4</sup>	
TS			U				


Fill in fields from categories above and complete type and part number.

Type No:


Full Part No:

**DIMENSIONS**

**SIGN**

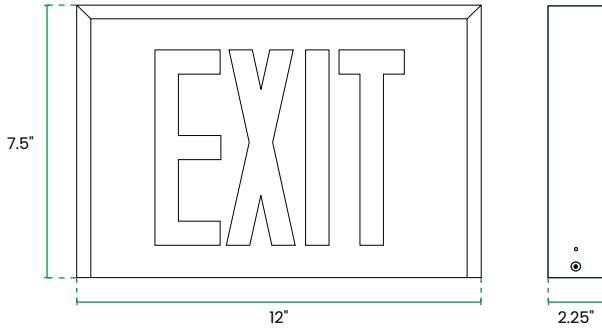

**CANOPY**

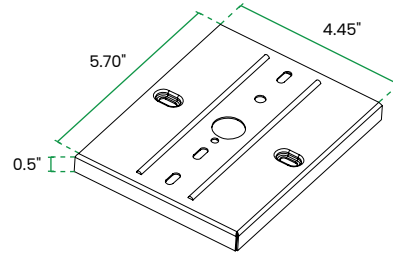

**ADJUSTING THE FACE PLATE**

- Face plate slides out for quick and easy installation.

