EVENLITE
LIVES DEPEND ON US

Project Name:	Approved By:
Catalog No:	Type No:

TELESIS TEXCS-URC

Commercial-Grade Universal Edgelit LED Exit Sign

TITLE 20 COMPLIANT

COLOR SELECTABLE

The Color Select Telesis TEXCS-URC offers a universal design and versatile mounting options, making it an ideal choice for commercial interior applications. Its contemporary style features soft curves, low-profile housings, and a brightly illuminated lens that creates a distinctive "floating" edge-lit appearance. New color-select technology allows the exit legend to be field-selected in either red or green, providing added flexibility to meet project requirements and local code preferences. With self-diagnostics provided standard, the TEXCS-URC provides a universal mounting kit for recessed ceiling/wall, surface wall, ceiling, or end mounting, along with field-selectable single or double faces.

CONSTRUCTION

- Low profile, flame resistant injection molded thermoplastic housing and trim plate with a satin finish, available in Aluminum Gray, Black, or White.
- Injection molded color-matched Endcaps and Canopy to match housing color selection
- The TEXCS-URC is provided with a field selectable Single Face Clear panel and a Double Face Exit Panel with a Mirror background divider. The Double Face sign has a Mirror reflector sealed between the two exit panels to simulate a clear background for Double Face exits. For additional field versatility the Double Face model includes a single sided mirror reflector with two adhesive strips that can be applied externally to cover over one exit face to convert to a Single Face Mirror sign. For a purpose sealed Single Face Mirror panel order option TEXCS1M
- Unique pivoting housing allows for hang straight installation on sloped ceilings, with color-matched pendant mounting options available up to 72 inches. (Please see Accessories on Page 2)
- Included Canopy with crossbar allows for surface end, top or wall mounting
- Last to assemble snap-in lens for versatility and ease of installation
- Suitable for indoor damp locations

ELECTRICAL

- Universal 120 or 277 VAC field selectable input
- Power Consumption: 2.5W for AC Red/Green models and 3.5W for EM Red/Green models.
- Battery backup items suitable for 5°C-50°C ambient temperature
- AC only item suitable for -25°C-50°C
- EM models feature a 3.2V long-life, maintenance-free Lithium Iron Phosphate battery, providing 120 minutes emergency run time.
- Solid state battery charging circuit provides 24-hour recharge
- Low voltage cut-off prevents battery deep discharge damage and ensures positive charge acceptance following an extended discharge
- Surge and brownout protection are standard
- EM models include Push to test Switch and AC present indicator
- On EM models, Self Test and Self Diagnostic are standard and enabled by factory default, with field selectable manual testing available to disable the Self Diagnostic function

ILLUMINATION

- Maintenance free LED light source with 25+ years life expectancy
- Crystal clear acrylic edge-lit lens with laser-etched legend
- Field-selectable Red or Green LED sign with 6" letters and 3/4' stroke for 100' code compliance. Features an internal switch based on the application to switch between Red or Green.

TEXCS-URC UNIVERSAL KIT

- The TEXCS-URC Universal includes an optional recessed backbox assembly with matching trim plate for recessed ceiling or wall mount installation
- The Universal Canopy and crossbar provide for optional surface mounting in Top, Wall, or End mount configurations
- The unique pivoting housing allows for wall mounting or for “hang-straight” applications on sloped ceilings
- The kit is provided with a field selectable single face clear edgelit lens, or included double face mirrored background lens with an additional mirror film for Single Face Mirror
- Field selectable Chevron directional indicators included as standard

TELESIS TEXCS-URC

Commercial-Grade Universal Edgelit LED Exit Sign

CERTIFICATION

- Tested and Listed by Underwriters Laboratories in compliance with UL924
- Meets or exceeds all performance standards as required by NFPA 101 Life Safety Code, NFPA 70-NEC and OSHA
- California Title 20 Certified

WARRANTY

- 5 year limited warranty - view complete warranty terms online at www.evenlite.com/terms-warranty.

ORDERING GUIDE

Example: TEXCS-EM-U-W-URC

MODEL	OPERATION	LETTER COLOR	HOUSING COLOR	FACES/BACKGROUND	OPTIONS[2]
TEXCS	**AC** AC Only (120/277 VAC) **EM** Battery Backup Emergency with Field-Selectable Self-Diagnostic	**U** Red/Green Field-selectable	**AG** Aluminum Gray **W** White **B** Black	**URC** Double Face/Universal Panel Kit (Spare Mirror Reflector Included)[1]	**TEXCS1M** Additional Single Face Mirrored Background Lens
TEXCS				**URC**	

ORDERING NOTES

1. The panel kit includes a spare mirror reflector with adhesive strips that can be applied externally to cover over one exit face of the Double Face panel. The covering then replicates a Single Face Mirrored sign. For a purpose sealed Single Face Mirror panel order option TEXCS1M
2. For greater versatility and options see Sovereign II Series

Fill in fields from categories above and complete type and part number.

Type No:	Full Part No:

ACCESSORIES

Example: PKIT-TEXCS-12-W

PENDANT KIT	MODEL	PENDANT LENGTH[1]				PENDANT ADAPTOR COLOR
PKIT	**TEXCS**	**12** 12-inch Swivel Pendant		**48** 48-inch Swivel Pendant		**AG** Aluminum Gray[1]
		24 24-inch Swivel Pendant		**60** 60-inch Swivel Pendant		**W** White
		36 36-inch Swivel Pendant		**72** 72-inch Swivel Pendant		**B** Black
PKIT	**TEXCS**					

ORDERING NOTES

1. Pendant rods are white.

ADDITIONAL IMAGES

SURFACE CEILING MOUNT
Green Legend

RECESSED MOUNT
Red Legend

PENDANT MOUNT

TELESIS TEXCS-URC

Commercial-Grade Universal Edgelit LED Exit Sign

DIMENSIONS

SURFACE END MOUNT

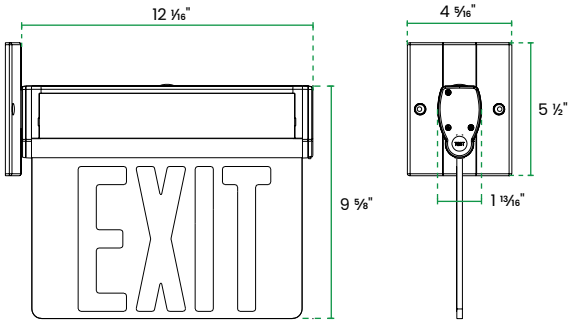

SURFACE CEILING MOUNT

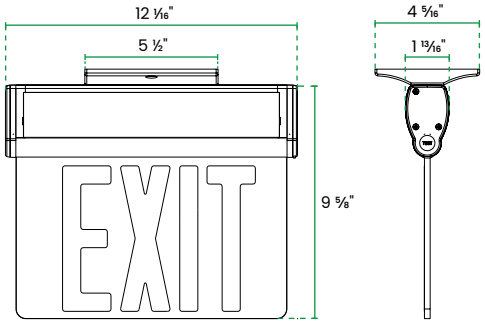

SURFACE WALL MOUNT

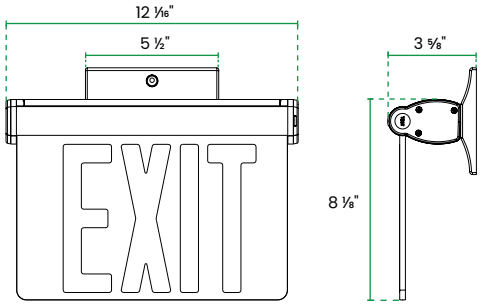

RECESSED MOUNT

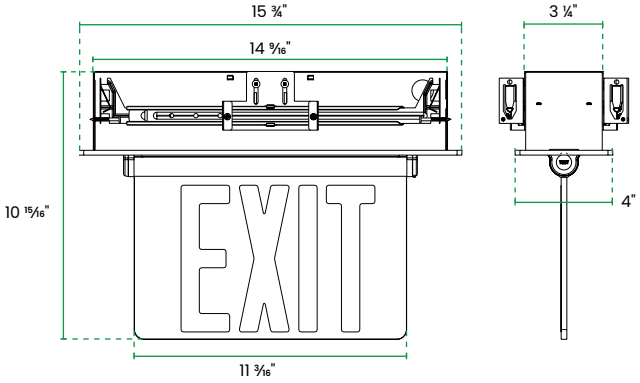
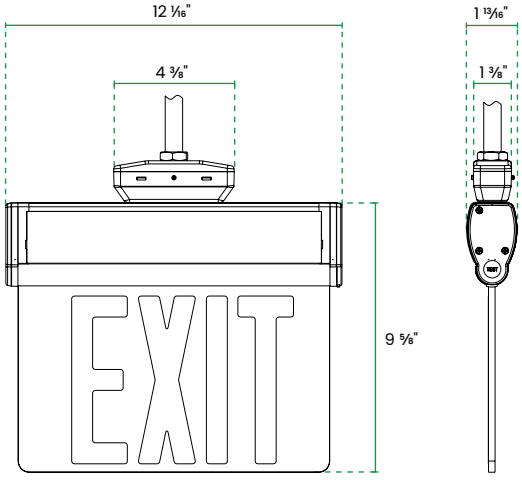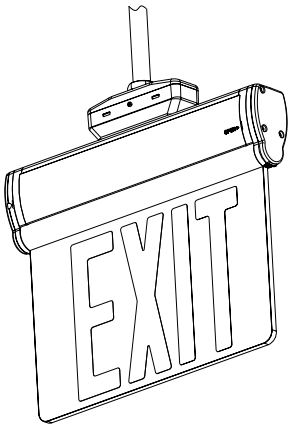
PENDANT KIT MOUNT