

AURORA

Ultra-Thin Die-Cast Photoluminescent/LED Exit Sign

The Aurora exit sign combines convenience and reliability with ultra-low operating costs. Its LEDs illuminate and charge photoluminescent letters during normal power and glow for 90 minutes during outages—no batteries or external light sources are required. With a sleek 5/8" profile, it blends seamlessly into any space. Available in single or double face, Aurora features high-quality die-cast aluminum housing in brushed aluminum, red, white, black, or custom finishes.



CONSTRUCTION

- Elegantly thin 5/8" Pressure Die Cast Aluminum. Available in Fine Grain Brushed Aluminum or powder coat finish in Red, White or Black. Custom finishes are available to order
- Light Guide, light engine, photoluminescent panel and electrical connectors are neatly housed in a single injection-molded frame assembly with flexible circuit board and simple mating connector
- Mounts to standard 4S Junction box in Wall, Canopy or Pendant mount configurations
- Unique snap fit housing design eliminates unsightly hardware
- Removable face with field selectable Chevron directional indicators
- Low profile canopy for universal end or top mount application
- Hang Straight 1/2" Extruded Aluminum matching Tube Pendant and adapters
- Optional polycarbonate face shield with snap-fit installation ideal for vandal resistant and low level applications (U.L. listed for floor proximity installation)

ELECTRICAL

- LED/Phosphor fusion technology delivers exceptional energy efficiency with just 2-watts total power consumption for either single or double face models
- Zero batteries, eliminates costly monthly battery testing and routine battery replacement and disposal
- Maintenance free, fully automatic operation
- Custom photoluminescent panel charges in the AC mode without reliance on external light sources providing self-sufficiency in outage conditions
- UL and CSA listed as standard "Suitable for use in damp locations 10° to 40° C".
- 120 or 277 VAC field selectable input
- Solid State circuitry provides optimum condition power supply for the LED's which are powered at less than 50% of their rated operating current ensuring minimal heat dissipation and subsequent exceptional LED life predicated to maintain 80% luminosity after 20 years continuous operation replace battery

ILLUMINATION

- Unique injection molded 3mm refractive light guide provides excitation for the photoluminescent material while also producing flawless legend uniformity
- Industry standard 6" high letters with 3/4" stroke with 100' visibility rating in both Normal and Emergency operation
- Legend is vibrantly illuminated at 18fL in the normal mode (AC LED powered) - 7 times the minimum UL 924 requirement at a 100' viewing distance
- Emergency mode illumination is provided by the pre-charged photoluminescent panel, which glows with a luminance sufficient to meet the 100' visibility rating at the end of the required 90 minutes duration
- Aurora end duration luminance is typically twice as bright as traditional photoluminescent signs that require larger lettering and housings with poor pale yellow legend and contrast, under normal ambient light conditions
- Maintenance free LED light source with 25+ year's life expectancy

CERTIFICATION

- Tested, approved and listed by Underwriters Laboratories to UL 924, meets CSA C22.2 No. 141-10, NFPA 101, NFPA 70NEC and OSHA requirements
- Buy American Act compliant

WARRANTY

- 5 year limited warranty - view complete warranty terms online at www.evenlite.com/terms-warranty.

AUR-1-BA-CN-RS

ORDERING GUIDE

MODEL	FACE COUNT	BODY COLOR	MOUNTING	OPTIONS	ORDERING NOTES	
AUR	1 Single	BK Black	SURFACE & RECESSED MOUNT		RS Polycarbonate Security Cover ³ M990010 Wire Guard ⁴	ORDERING NOTES 1 Universal includes two faces, backplate and canopy 2 Universal End/Ceiling 3 Vandal-resistant snap lock clear polycarbonate cover. Available for Single or Double face signs in all mounting configurations. Listed for floor proximity installation 4 Wall mount only
	2 Double	WH White	1B Back Mount No Canopy			
	U Universal ¹	BA Brushed Aluminum RD Red CC Custom Color	CN Universal Canopy Mounting Kit ²			
			REC Recessed Wall Mount <i>Coming Soon</i>			
			PENDANT MOUNT			
			PA 12" Hang Straight Pendant Mount			
			PB 24" Hang Straight Pendant Mount			
			PC 36" Hang Straight Pendant Mount			
			PD 48" Hang Straight Pendant Mount			
			PE 60" Hang Straight Pendant Mount			
PF 72" Hang Straight Pendant Mount						
AUR						

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:

ADDITIONAL IMAGES



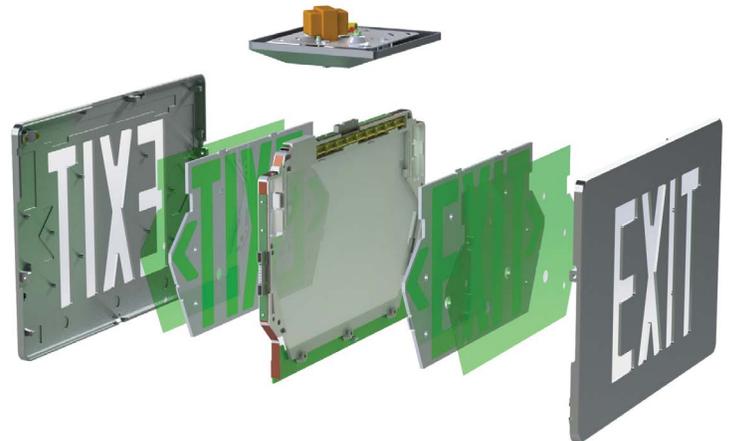
BLACK FINISH



WHITE FINISH



RED FINISH


 BRUSHED ALUMINUM FINISH
 With Hang Straight Pendant


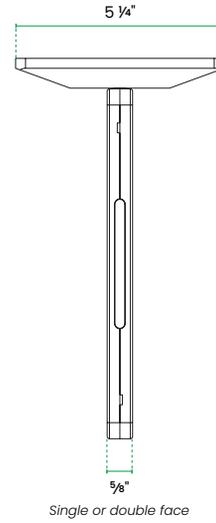
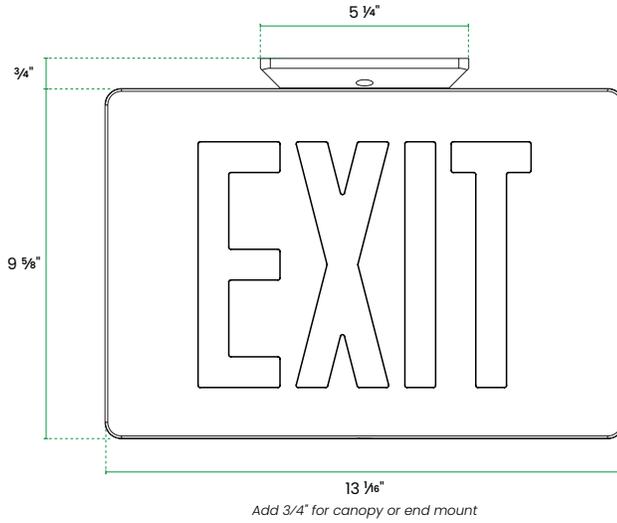
CONSTRUCTION VIEW



POLYCARBONATE SECURITY COVER

DIMENSIONS & MOUNTING

SURFACE MOUNT



UNIVERSAL MOUNT

