

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

TELESIS - LED EXIT

LED Exit Sign with ISA

The Telesis TSMA is designed to comply with the State of Massachusetts Building Code requirements, and provide an EXIT sign with a 6" International Symbol of Accessibility.

Classic styling and the convenience of installing one sign makes the TLA an obvious choice.

Construction

- White powder coated steel finish is standard with options for custom colors
- Universal mounting canopy included for ceiling mounting, or end mounting, single or double face to order
- Universal mounting pattern is stamped into the back plate for easy surface mounting to a j-box
- Matching 6" EXIT sign available, order as TS6

Electrical

- Push to test switch and AC present indicator provided on EM models
- Long life Nickel Cadmium maintenance free battery provides the required 90 minutes of emergency operation
- Operating temperature range 10°C to 45°C
- Optional 2 hour battery is available
- Field Selectable 120 or 277 VAC input
- Integral AC Present Indicator and Push to Test Switch
- Solid state transfer relay ensures reliability, no relay contacts to oxidize and fail
- Electronic Control Circuit and Isolation Transformer provide current control and circuit protection ensuring optimum LED efficiency and life

Illumination

- Maintenance free LED light source with low energy consumption <5 watts and long life
- Field selectable chevron directional indicators
- Red or Green LED's with 6" letter and 3/4" stroke and 6" International Symbol of Accessibility

Certification

- CSA-US listed and meets UL 924, Massachusetts Building Code, NFPA 101 Life Safety Code, NFPA 70-NEC and OSHA requirements

Warranty

- 3 Year limited warranty




Meets the requirements of the State of Massachusetts




Dimensions in inches

Faceplate slides up and outward for quick and easy installation

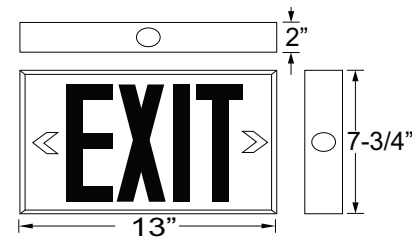

Dimensions in inches

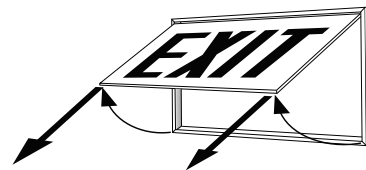

Faceplate slides up and outward for quick and easy installation

1011.2.1.2 Accessible Exits: Where exit signs are required by Section 1011.1 of this code, accessible exit doors at the level of exit discharge that directly to the accessible paths of exit discharge shall additionally be marked by the International Symbol of Accessibility. Such symbol shall be not less than 6 Inches high and shall be incorporated into the required exit sign or shall be located adjacent to it. Such symbol shall meet the requirements of Section 1011.

Example: TSMA-EM-R-1-W

ORDERING GUIDE - TSMA

Model	Operation	Letter Color	Number of Faces	Housing/Face Color	Options
TSMA Telesis LED Exit/ with 6" ISA	AC AC only operation-up 120/277 VAC EM NiCad Battery Backup	R Red LED G Green LED	1 Single Face with Canopy 2 Double Face with Canopy	W White (Standard)	BA Brushed Aluminum Face and Housing CC Custom Color (Consult Factory) 2H Two Hour Emergency Operation TSMAWG Wire Guard for TLA 20" x 9" x 2-1/2" TS6WG Wire Guard for TLA6 14" x 10" x 4.5"
TS6 Matching 6" Exit only					
TSMA					

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number: