EVENLITE
LIVES DEPEND ON US

Project Name:	Approved By:
Catalog No:	Type No:

TELESIS TEXCOM

Commercial-Grade Universal Edgelit LED Combo Exit Sign



TITLE 20 COMPLIANT

COLOR SELECTABLE

Sleek by design. Versatile by nature. The Telesis TEXCOM brings a fresh look to the traditional exit and emergency lighting combo, pairing a refined edge lit sign with 460 lumens of emergency illumination. Its streamlined profile and choice of white, aluminum gray, or black finishes complement the space around it, while Color Select technology puts red or green exit illumination at your fingertips. Everything needed for surface or recessed mounting comes in the box, including four lamp heads: two factory installed on the recessed trim plate and two additional heads for field installation in surface mount applications. With universal face configurations and flexible mounting options, one thoughtfully designed unit opens up a world of possibilities.

TEXCOM-URC UNIVERSAL KIT

- The universal kit includes everything needed for surface or recessed mounting. The recessed trim plate comes with two factory installed lamp heads. Two additional lamp heads are included for field installation in surface mount applications. Both a single face clear panel and a double face mirrored background lens are included. An additional mirror film is provided to cover one face of the double face lens, converting it to a single face sign with a mirrored background. Directional chevron indicators are also included for field installation as needed.

CONSTRUCTION

- Integrated edge-lit exit sign and emergency lighting combination reduces installation complexity by combining two life safety products into one fixture.
- Injection-molded, flame-resistant thermoplastic housing combines an exit sign and emergency lighting heads in one unit. Available in Aluminum Gray, Black, or White finishes.
- Universal acrylic panel features field-selectable red or green EXIT illumination with 6" high letters, ¾" stroke width, and universal directional chevrons.
- The TEXCOM is provided with a field selectable Single Face Clear panel and a Double Face Exit Panel with a Mirror background divider. The Double Face sign has a Mirror reflector sealed between the two exit panels to simulate a clear background for Double Face exits. For additional field versatility, the Double Face model includes a single sided mirror reflector with two adhesive strips that can be applied externally to cover one exit face and convert it to a Single Face Mirror sign. For a purpose sealed Single Face Mirror panel, order option TEXCS1M.
- Includes all components for surface wall, surface ceiling, or recessed wall and recessed ceiling mounting in one universal kit.
- The pivoting housing allows the sign to hang straight on sloped ceilings. Optional color-matched pendant kits are available in lengths up to 72 inches. See Accessories on Page 2.

ILLUMINATION

- Field selectable red or green LED illumination allows the legend color to be configured in the field to meet project requirements.
- Two 1.5 Emergency Lighting heads delivering a combined 460 lumens in emergency mode.
- The exit legend utilizes 6 inch letters with a 3/4 inch stroke for a 100 foot rated viewing distance.
- The illuminated legend incorporates a color matched diffuser to provide uniform appearance and visibility.
- Red illumination is provided as the factory default setting and can be field changed to green as required.

ELECTRICAL

- Universal 120–277 VAC input, 50/60 Hz, with 4.5W input power.
- Rechargeable 3.2V, 3,200mAh lithium iron phosphate (LiFePO4) battery provides 120 minutes of emergency operation.
- Battery recharges within 24 hours, with trickle charging after reaching full charge.
- Solid-state transfer circuitry includes brownout transfer, low-voltage battery disconnect, overload protection, and short-circuit protection.
- Test switch and charge indicator provided for manual testing and charging status.
- Self-testing and self-diagnostics are provided as standard; manual testing mode can be selected when required.

CERTIFICATION

- UL 924 listed meets NFPA 101 Life Safety Code,
- NFPA 70-NEC
- OSHA requirements
- California Energy Commission (CEC) Title 20 Compliant

WARRANTY

- 5 year limited warranty - view complete warranty terms online at www.evenlite.com/terms-warranty.

TELESIS TEXCOM

Commercial-Grade Universal Edgelit LED Combo Exit Sign

ORDERING GUIDE

Example: TEXCOM-U-AG-URC

MODEL	LETTER COLOR	HOUSING COLOR	FACES/BACKGROUND
TEXCOM	**U** Red/Green Field-Selectable	**AG** Aluminum Gray **W** White **B** Black	**URC** Double Face/Universal Panel Kit (Spare Mirror Reflector Included)[2]
TEXCOM	U	[1]	URC

ORDERING NOTES
1. Select from above.
2. Additional lamp heads are provided for surface mount applications

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:

ACCESSORIES

Example: PKIT-TEXCS-12-W

PENDANT KIT	MODEL	PENDANT LENGTH[1]	PENDANT ADAPTOR COLOR
PKIT	TEXCS	**12** 12-inch Swivel Pendant **24** 24-inch Swivel Pendant **36** 36-inch Swivel Pendant **48** 48-inch Swivel Pendant **60** 60-inch Swivel Pendant **72** 72-inch Swivel Pendant	**AG** Aluminum Gray[1] **W** White **B** Black
PKIT	TEXCS		


ORDERING NOTES
1. Pendant rods are white.

PANEL OPTIONS[1]	
TEXCS1M	Additional Single Face Mirrored Background Lens[2]


ORDERING NOTES
1. The panel kit also includes a spare mirror reflector with adhesive strips that can be applied externally to cover over one exit face. The covering then replicates a Single Face Mirrored sign. For a purpose sealed Single Face Mirror reflector panel, order option TEXCS1M
2. For greater versatility and options see Soveriegn II Series

DIMENSIONS


RECESSED CEILING MOUNT

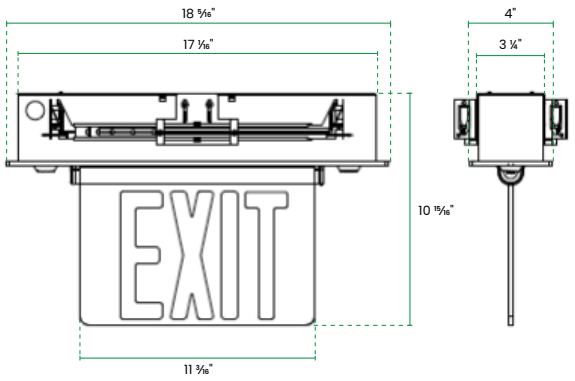


SURFACE CEILING MOUNT

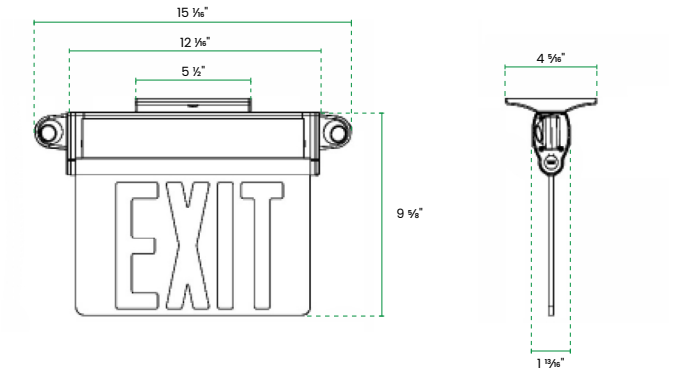

RECESSED WALL MOUNT

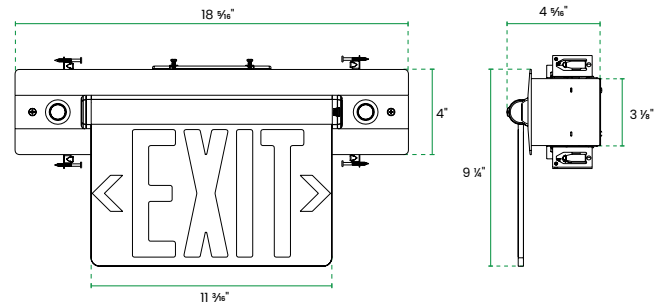

SURFACE WALL MOUNT

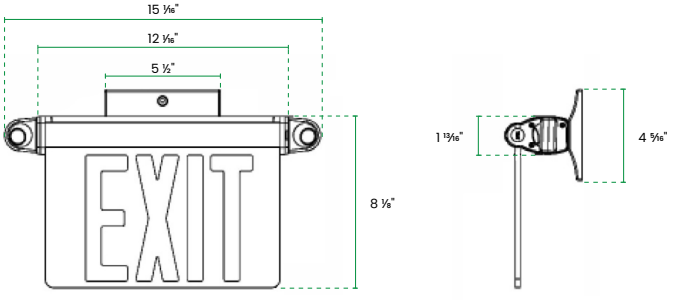

SPACING INFORMATION

SPACING DISTANCE	PATH WIDTH	
	3FT WIDTH PATH	6FT WIDTH PATH
7.5ft	42ft	40ft
10ft	45ft	45ft

ADDITIONAL IMAGES



SURFACE CEILING MOUNT
White



SURFACE WALL MOUNT
White