

TELESIS TEXCS

Commercial-Grade Surface Mount Edgelit LED Exit Sign

The Color Select Telesis TEXCS brings greater flexibility and a clean, contemporary look to commercial interior applications. This commercial grade edge lit exit sign features field selectable red or green legends, giving distributors, contractors, and designers the versatility to meet project requirements with a single solution. Its unique pivoting lens assembly provides added installation flexibility, allowing the sign to transition from ceiling to wall mounting and accommodate various mounting angles, including sloped ceiling applications. A slim profile and illuminated acrylic lens create a distinctive floating appearance, while self test and self diagnostics are provided standard on emergency models. With versatile mounting configurations and field selectable single or double face options, the TEXCS is designed to make specifying, stocking, and installation easier.



CONSTRUCTION

- Low profile, flame resistant injection molded thermoplastic housing and trim plate with a satin finish, available in Aluminum Gray or White.
- Injection molded color-matched Endcaps and Canopy to match housing color selection
- The TEXCS is provided with a field selectable Single Face Clear panel and a Double Face Exit Panel with a Mirror background divider. The Double Face sign has a Mirror reflector sealed between the two exit panels to simulate a clear background for Double Face exits. For additional field versatility the Double Face model includes a single sided mirror reflector with two adhesive strips that can be applied externally to cover over one exit face to convert to a Single Face Mirror sign. For a purpose sealed Single Face Mirror panel order option TEXCSIM
- Unique pivoting housing allows for hang straight installation on sloped ceilings, with color-matched pendant mounting options available up to 72 inches. (Please see Accessories on Page 2)
- Universal surface mounting canopy for wall, ceiling, or end mounting
- Self-adhesive Chevron arrows with template enable on-site configuration
- Suitable for indoor damp locations

ELECTRICAL

- EM models feature a 3.2V long-life, maintenance-free Lithium Iron Phosphate battery, providing 120 minutes emergency run time.
- Solid state battery charging circuit re-charges the Lithium Iron Phosphate battery in just 2 hours after a 90 minute discharge

- On EM models, Self Test and Self Diagnostic are standard and enabled by factory default, with field selectable manual testing available to disable the Self Diagnostic function.
- Universal 120 or 277 VAC field selectable input
- Power Consumption: 2.5W for AC Red/Green models and 3.5W for EM Red/Green models.
- Battery backup items suitable for ta 5°C–50°C ambient temperature
- AC only and 2AC item suitable for ta –25°C–50°C
- Solid state battery charging circuit provides 24-hour recharge
- Low voltage cut-off prevents battery deep discharge damage and ensures positive charge acceptance following an extended discharge
- Surge and brownout protection are standard
- EM models include Push to test Switch and AC present indicator
- Battery backup models suitable for –5°C–50°C ambient temperature
- AC only models suitable for –25°C–50°C ambient temperature.

ILLUMINATION

- Maintenance free LED light source with 25+ years life expectancy
- Crystal clear acrylic edge-lit lens with laser-etched legend
- Field-selectable Red or Green LED sign with 6" letters and 3/4" stroke for 100' code compliance. Features an internal switch based on the application to switch between Red or Green.

CERTIFICATION

- Tested and Listed by Underwriters Laboratories in compliance with UL924
- Meets or exceeds all performance standards as required by NFPA 101 Life Safety Code, NFPA 70-NEC and OSHA
- California Title 20 Certified

WARRANTY

- 5 year limited warranty - view complete warranty terms online at www.evenlite.com/terms-warranty.

ORDERING GUIDE

Example: TEXCS-EM-U-W-1C

MODEL	OPERATION	LETTER COLOR	HOUSING COLOR	NO. OF FACES	PANEL OPTIONS ²	ORDERING NOTES
TEXCS	AC AC Only (120/277 VAC)	U Universal	AG Aluminum Gray	STANDARD	TEXCSIM Additional Single Face Mirrored Background Lens	¹ The 2M Double Face panel also includes a spare mirror reflector with adhesive strips that can be applied externally to cover over one exit face. The covering then replicates a Single Face Mirrored sign. For a purpose sealed Single Face Mirror reflector panel, order option TEXCSIM ² For greater versatility and options see Sovereign II Series
	EM Battery Backup Emergency with Field-Selectable Self-Diagnostic		W White	1C Single Face, Clear Background		
				2M Double Face, Mirror Background (Spare Mirror Reflector Included) ¹		
TEXCS						

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:

ACCESSORIES

Example: PKIT-TEXCS-12-W

PENDANT KIT	MODEL	PENDANT LENGTH ¹				PENDANT ADAPTOR COLOR	ORDERING NOTES
PKIT	TEXCS	12	12-inch Swivel Pendant	48	48-inch Swivel Pendant	AG Aluminum Gray ¹	¹ Pendant rods are white.
		24	24-inch Swivel Pendant	60	60-inch Swivel Pendant	W White	
		36	36-inch Swivel Pendant	72	72-inch Swivel Pendant		
PKIT	TEXCS						

ADDITIONAL IMAGES



SURFACE CEILING MOUNT
Green Legend




SURFACE CEILING MOUNT
Red Legend




PENDANT MOUNT

DIMENSIONS


SURFACE END MOUNT

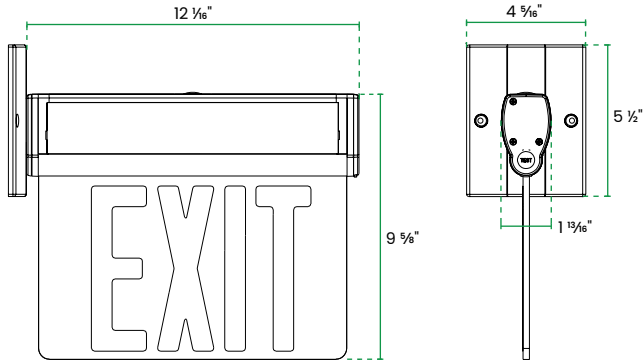

SURFACE CEILING MOUNT

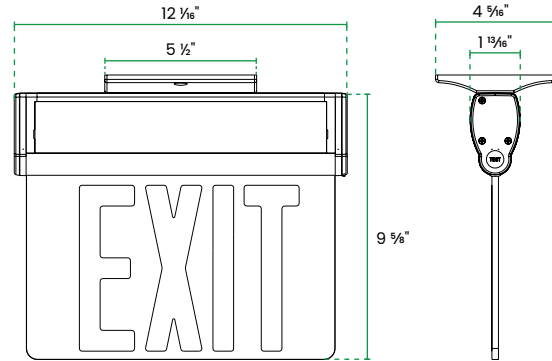

SURFACE WALL MOUNT

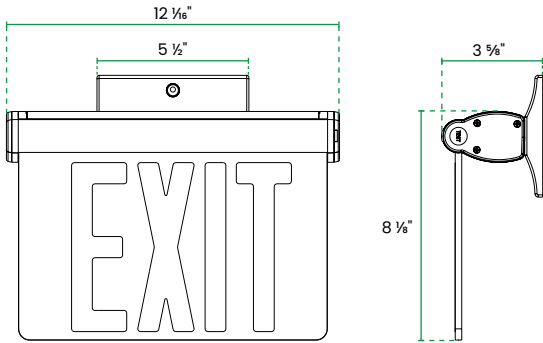

SLOPED CEILING MOUNT

