

Project Name:	Approved By:
Catalog No:	Type No:

PF50

50' Photoluminescent Exit Sign

The PF Series features a framed open-face design for easy installation and maintenance-free operation, with a lifespan of 25+ years. Its sustainable design makes it ideal for green buildings, and it is recyclable at the end of its life. Rated for a 50-foot viewing distance, the PF Series requires only 5 foot-candles (54 lux) of light for activation during times of building occupancy.







CONSTRUCTION

- PF Series is constructed using an open face design with a black plastic frame and PVC photoluminescent panel
- Open face design allows for the use of red or green letters and provides high contrast and visibility
- 6" letter with 3/4" stroke, single face wall mount
- Universal field applicable chevron directional indicators are included with each sign
- Low profile single face wall mount is suitable for over the door or low mounting requirements
- Signs can be easily relocated in the event of building renovations or changes in the path of egress


ILLUMINATION

 Activation requires only 5 foot-candles (54 lux) of unfiltered fluorescent lighting for 60 minutes (must be externally illuminated during normal building occupation)

CERTIFICATION

- PF series photo luminescent exit signs are LEED point qualified and recyclable at the end of their useful life
- Tested and listed to UL 924, meets NFPA 101 Life Safety Code and OSHA requirements
- Buy American Act compliant

DIMENSIONS

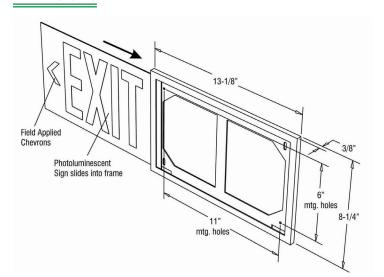

ORDERING GUIDE

PF50-1-R-BK

MODEL	NO. OF FACES	LETTER COLOR	FRAME COLOR	ORDERING NOTES 1 Single Face, Wall Mount only
PF50	1 Single Face ¹	R Black G Green	BK Black	
PF50	1		вк	

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:

