

TELESIS TRE-CT

Connecticut Code-Compliant Edgelit LED Exit Sign

The Telesis TRE-CT is designed to comply with the State of Connecticut building code requirements, and provide a combined EXIT sign with the 6" International Symbol of Accessibility in a modern edgelit LED sign. Constructed with a pure white extruded aluminum rounded housing and high-grade clear acrylic legend, the Telesis TRE combines quality construction and contemporary styling to create a distinctive architectural aesthetic. Now incorporating the new "dynamic character leaning forward" symbol as required in Substitute House Bill No. 5050, Public Act No. 16-78 "An Act of Modernizing the Symbol of Access for Persons with Disabilities"



CONSTRUCTION

- Attractive, white powder coat finish extruded aluminum housing universal surface mount standard
- Clear acrylic edgelit lens is provided for single face signs a mirrored or white background is available for single or double face signs (required for DF)
- Unique mounting canopy for universal installation on surface ceiling or wall mount applications
- Optional pendant or end mounting available
- Field adjustable chevrons are standard
- Red or Green LED's with 6" letters and 3/4" stroke and 6"
- Matching 6" exit only sign is available, order as TRE6

ELECTRICAL

- Maintenance free LED Light source with low energy consumption and long life
- Push to test switch and AC present indicator provided on EM models
- Long life Nickel Cadmium maintenance free battery provides more than 90 minutes of emergency run time
- Operating temperature range of the battery is 10° C to 45° C
- Solid state battery charging circuit recharges the NiCad battery in just 24 hours after a 90 minute discharge
- Universal 120/277 VAC 50/60 HZ field selectable input
- Solid state transfer relay ensures reliability, no relay contacts to oxidize and fail
- Consumes only 2 watts or less for high energy efficiency

CERTIFICATION

- CSA/US Listed meets UL 924, Connecticut Building Code, NFPA 101 Life Safety Code, NFPA 70-NEC and OSHA requirements
- Buy American Act compliant

COMPLIANCE

- 1011.2.1.2 Accessible Exits:** Where exit signs are required by Section 1011.1 of this code, accessible exit doors at the level of exit discharge that lead directly to the accessible paths of exit discharge shall additionally be marked by the International Symbol of Accessibility. Such symbol shall be not less than 6 Inches high and shall be incorporated into the required exit sign or shall be located adjacent to it. Such symbol shall meet the requirements of Section 1011.

WARRANTY

- 3 year limited warranty - view complete warranty terms online at www.evenlite.com/terms-warranty.

ORDERING GUIDE

TRE-EM-R-1C-W/SC

MODEL		OPERATION	LETTER COLOR	FACE COUNT	
TRE	Exit with 6" ISA	AC AC Only (120/277V)	6" LEGEND SIZE with 6" ISA	STANDARD	OPTIONAL
TRE6	Matching 6" EXIT only sign	EM Battery Backup Emergency	R Red G Green	1C Single Face, Clear Background	1W Single Face, White Background 1M Single Face, Mirror Background 2M Double Face, Mirror Background 2W Double Face, White Background
MOUNTING		OPTIONS		ORDERING NOTES	
w/sc	Wall or Surface Ceiling Mount ¹	BK Black Housing BA Brushed Aluminum CC Custom Color ² PK Pendant Mount Kit ³	SE Surface End Mount SW Special Wording ² 2H Two Hour Run Time	ORDERING NOTES 1 Double Face Signs can be ceiling or end mount only 2 Consult Factory 3 Call for available lengths	
w/sc					


Fill in fields from categories above and complete type and part number.

Type No:


Full Part No:

DIMENSIONS

WALL & CEILING MOUNT

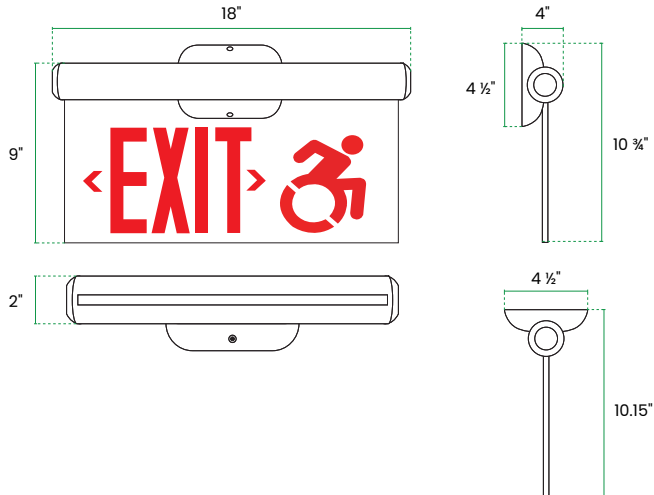

END MOUNT

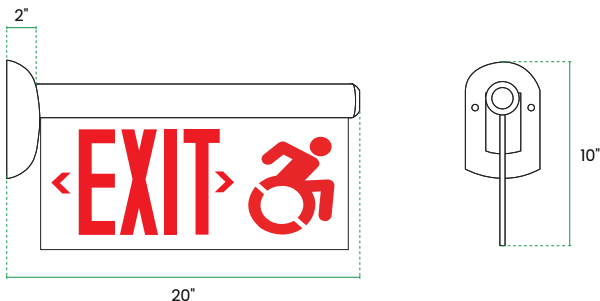

ADDITIONAL IMAGES



TRE6
Matching 6" Exit Sign