

Project Name:	Approved By:
Catalog No:	Type No:

## **SENTRY CHY HYBRID**

Die-Cast Photoluminescent/LED Exit Sign

The Sentry Hybrid LED and Photoluminescent exit sign combines the reliability of both technologies into one energy-efficient, maintenance-free sign that consumes only 1/2 watt of power with no batteries to replace. Its sleek, low-profile design (just 2.4") features softened corners and chamfered edges. Available in a standard brushed aluminum stencil over black or white body, or in all white, all black, or all brushed aluminum finishes, Sentry Hybrid LED can match any projects aesthetic.









#### **CONSTRUCTION**

- Maintenance-free LED light source, life expectancy of 25+ years
- Damp location is standard
- Optional recessing frame, polycarbonate face shield with tamper proof access screws, pendant & specialty mounts
- Low profile universal canopy with cast 3/4" nipple and locking nuts
- Hidden knock out access points and universal mounting pattern for wall mounting
- Field selectable directional chevrons
- Fine grain brushed aluminum stencil trim standard, other finishes available
- Two piece thick wall construction housing from heavy-duty die cast aluminum alloy, removable front stencil face with overlapping light seal

#### **ELECTRICAL**

- LED/Phosphor fusion technology delivers exceptional energy efficiency with just 1/2-watt power consumption for single & double-face AC models.
- No Battery to replace ever and completely maintenance free, fully automatic operation

 120 or 277 VAC field-selectable input with quick install push wire connectors

#### **ILLUMINATION**

- Green legend illumination with 100' rated viewing distance with 6" letter height and 3/4" stroke
- LED'S provide normal letter illumination and the photo luminescent material provides emergency illumination
- No external light source required, as the internal LEDs keep the phosphors saturated and ready for emergency operation

#### **CERTIFICATION**

- Tested, approved and listed by Underwriters Laboratories to UL 924, meets CSA C22.2 No. 141-10, NFPA 101,
- NFPA 70-NEC and OSHA requirements
- California Energy Commission (CEC) Title 20 Compliant
- Buy American Act compliant

#### WARRANTY

 5 year limited warranty - view complete warranty terms online at www.evenlite.com/terms-warranty.

ORDERING GUIDE CHY-1-AB-CN-PC1

MODEL	FACE COUNT	BODY COLOR	MOUNTING	OPTIONS	ORDERING NOTES  1 Universal End/Ceiling
СНҮ	<ol> <li>Single Face</li> <li>Double Face</li> </ol>	AB Brushed Face, Black Body BB All Black WW All White AA All Brushed Aluminum AW Brushed Aluminum, White Body CC Custom Color	Back Mount     Canopy Mounting Kit¹     REC Recessed Mounting Kit     PA 12" Swivel Pendant Mount     PB 24" Swivel Pendant Mount     PC 36" Swivel Pendant Mount	TP Tamper Proof Screws PC1  %"PC Faceplate2 PC2  %"PC Faceplate2 M990010 Wire Guard3	2 Includes tamper proof screws (TP) 3 Wall mount only
СНУ			PD 48" Swivel Pendant Mount		

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:






# **SENTRY CHY HYBRID**

Die-Cast Photoluminescent/LED Exit Sign

## **DIMENSIONS**

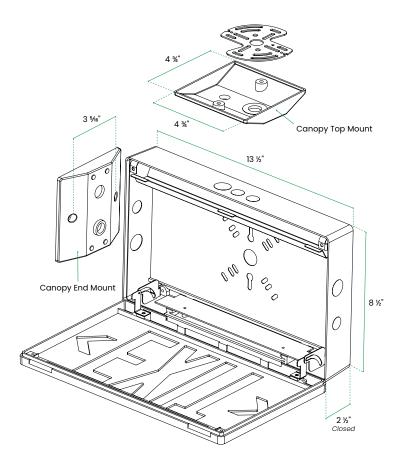

## **SWIVEL PENDANT MOUNTING**

